



Purchaser Order: 4505412588/03

Form : 10.9-C

protec



Serial Number: M22B15158
Order Number: SLAUGS -01-001

NATURAL ESTER FILLED TRANSFORMER

CLASS KUAN

THREE PHASE

HERTZ

CAUTION!

VOLTAGE RATING 12470 - 41607/2400
KVA RATING 15000 CONTINUOUS 65 °C RISE SELF COOLED

INSTRUCTION BOOK INSIDE CONTROL CABINET
BEFORE INSTALLING OR OPERATING READ INSTRUCTIONS POC-G-1003

HIGH VOLTAGE CONNECTION			
VOLTS	KW/MS °C AMPS	DAL	POS
13080	661		1
17700	678		2
12470	684		3
17160	712		4
11850	731		5

LOW VOLTAGE CONNECTION			
VOLTS	KW/MS °C AMPS		
41607/2400	2840		



- NOTES
1. OPERATING PRESSURES OF LIQUID PRESERVATION SYSTEM
 2. 5.0 PSI POSITIVE TO 3.0 PSI NEGATIVE
 3. TANK DESIGNED FOR 120 PSI VACUUM FILLING
 3. LIQUID LEVEL CHANGE 0.767 INCH PER 10 °C CHANGE IN LIQUID TEMPERATURE
 4. LIQUID LEVEL BELOW TOP SURFACE IN THE HIGHEST POINT OF HIGHEST HANDHOLE FLANGE AT 25 °C IS 11.81 INCHES
 5. 7.57 PERCENT IMPEDANCE AT RATED VOLTS AT 15000 KVA
 6. NLT TO (NO LOAD TAP CHANGER)

APODACA, NUEVO LEON
MADE IN MEXICO



LV WINDING CU
HV WINDING CU
LV BIL 75 KV
HV BIL 110 KV

LIQUID FILLED DISTRIBUTION TRANSFORMER (DF)

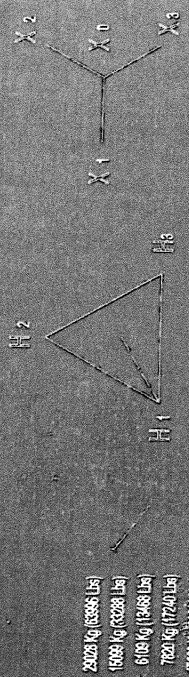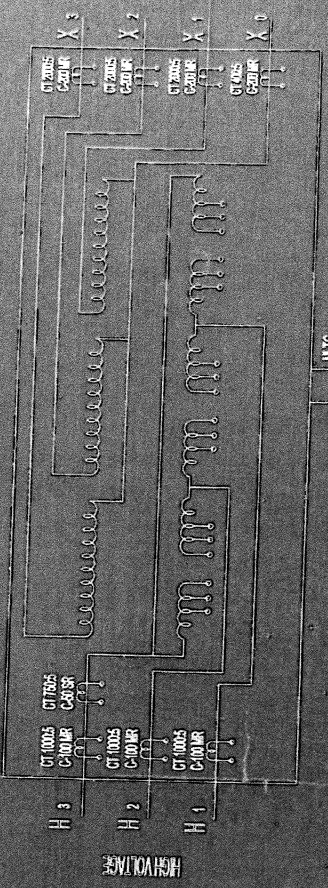

APPROX. WEIGHT IN KG AND POUNDS

TOTAL	29028 Kg (63966 Lbs)
CORE & COIL	15089 Kg (33288 Lbs)
TANK AND FITTINGS	6109 Kg (13483 Lbs)
NATURAL ESTER (2357 GAL)	7820 Kg (17240 Lbs)
UNTANKING OF HEAVIEST PIECE	15089 Kg (33288 Lbs)

MANUFACTURE DATE:




CONTAINS NATURAL ESTER WITH LESS THAN 10% MOF
POCS WHEN MANUFACTURED

MAR-22



LIQUID FILLED DISTRIBUTION
TRANSFORMER IZP9

LV WINDING CU
HV WINDING CU
LV BIL 75 kV
HV BIL 110 kV

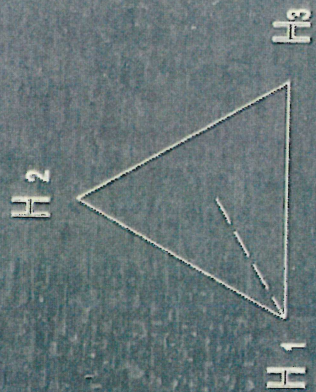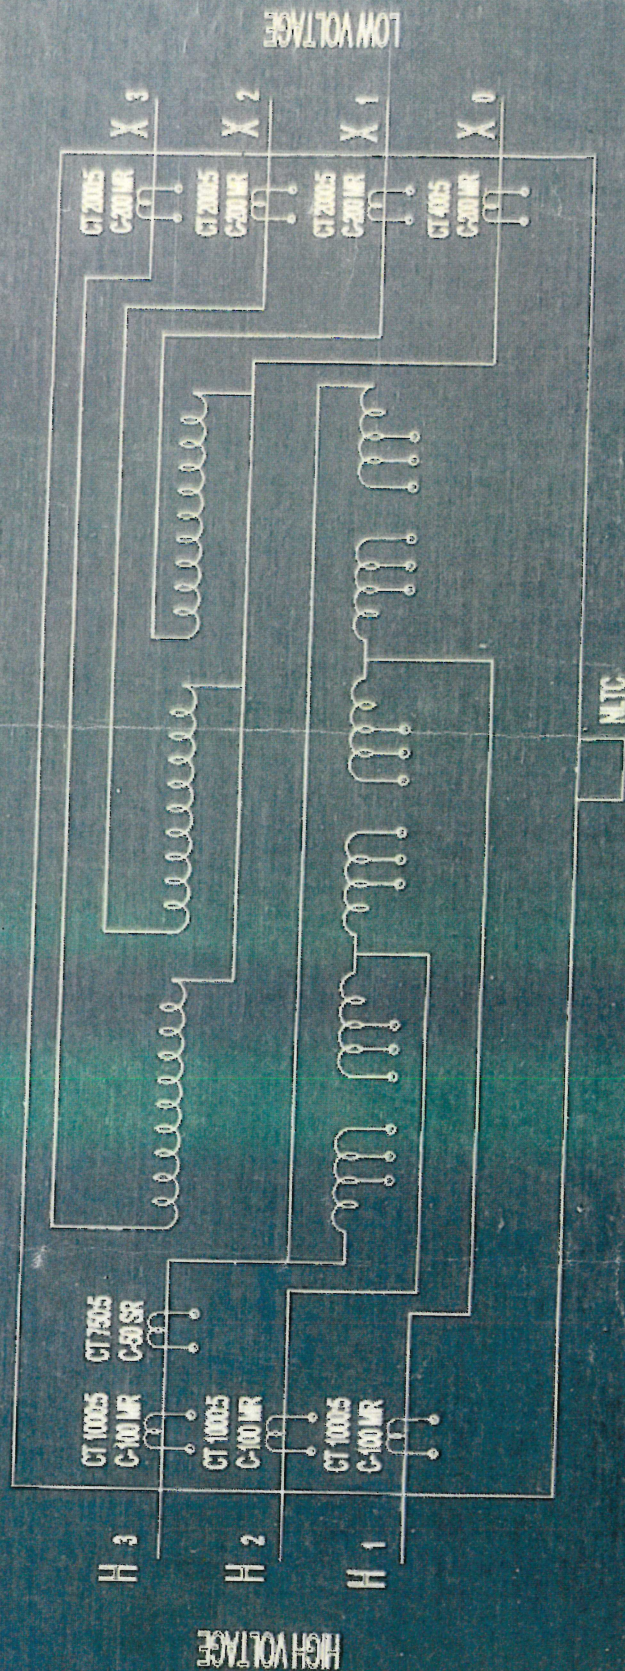

APPROX. WEIGHT IN KG AND POUNDS

TOTAL

CORE & COIL

TANK AND FITTINGS

NATURAL ESTER (2357 GAL)

UNTANKING OF HEAVIEST PIECE

29028 Kg (63938 Lbs)
15088 Kg (33288 Lbs)
6109 Kg (13458 Lbs)
7820 Kg (17240 Lbs)
15088 Kg (33288 Lbs)

MANUFACTURED DATE:

MAR-22

CONTAINS NATURAL ESTER WITH LESS THAN 1PPM OF

PCBS WHEN MANUFACTURED